



DOOR HARDWARE
SPECIALIST





HINGES

- High performance two ball bearing butt hinges Stainless Steel hinge pin Grade 13, conforming to BS EN 1935
- CE marked
- Template drilled fixing pattern
- Suitable for use on doors up to 120kg Available in square and round corners

BRANDS



FINISHES

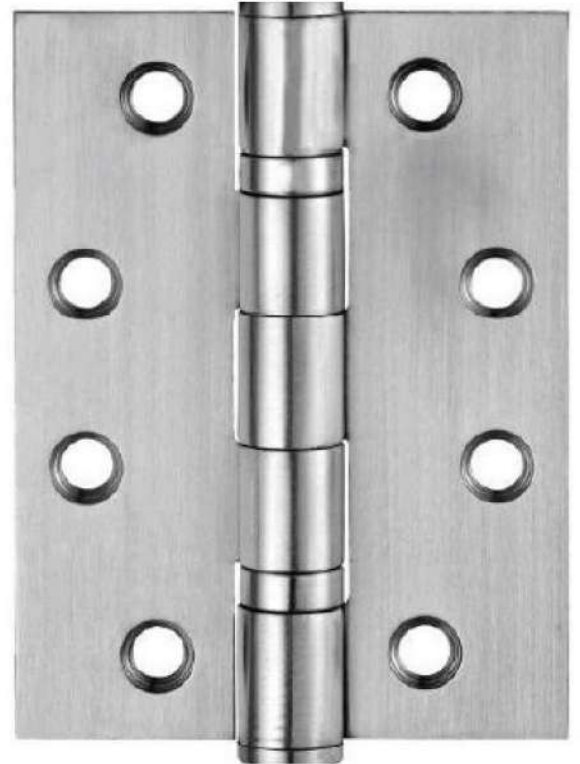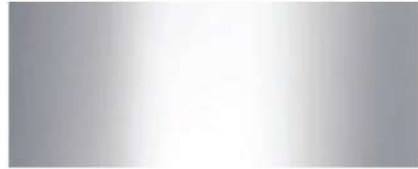


DOOR CLOSER

- Closing force EN1-6 with variable adjustment
- Can be used for right and left hand doors without conversion
- Mechanical latching action which accelerates the door shortly before the closed position
- Closing speed can be individually adjusted
- Integrated back check, slows down doors that are thrown open forcefully
- Visual closing force display for easy control of the setting

BRANDS



FINISHES

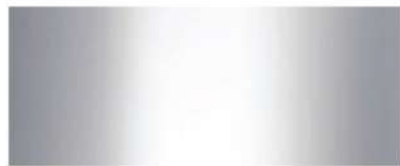

LEVER HANDLE

- Spring assisted lever handles
- 52mm push on rose with 8mm projection as standard
- Tested for 200,000 cycles
- Suitable for use on fire/smoke door assemblies
- Add suffix S for same design on Square rose and Square escutcheons



BRANDS



FINISHES



MORTISE LOCKS

- Mortise sash lock with reversible Latch and 20mm projecting double throw Deadbolt, conforming to BS EN 12209
- CE marked
- 8/9mm grip tight square follower
- Square/round corners
- Supplied with suitable screws and fixings

BRANDS



FINISHES



CYLINDER

- Solid brass housing and plugs
- Top and bottom brass pins
- 9mm wide Cam set in for 30 deg intervals
- Supplied with three Nickel plated brass Keys with square head for better grip
- Tested for 100,000 cycles
- Available in Key Alike and Key differ
- Suitable for bespoke master key systems
- Supplied with suitable screws and fixings

BRANDS



FINISHES




PANIC SYSTEM

- Tested according to EN 1125, EN 1634 & EN 1191
- Only suitable for use as a closure system according to EN 1125 with a tested and approved lock
- Suitable for use on smoke control and fire doors based on relevant tests
- Can be used for DIN left / DIN right
- Lever arms cranked wide, particularly suitable for electronic locking cylinders and short PZ distances

BRANDS



FINISHES

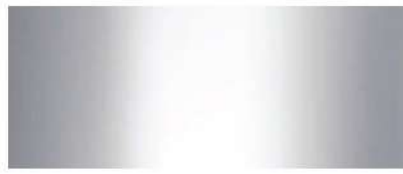

PANIC FUNCTIONS D&E

ECO-Panic mortise lock - GBS92

- Tested and approved according to EN 179, EN 1125, DIN 18 250 and EN 12 209
- For single-leaf wooden and steel fire doors
- Dead bolt throw*:
- Panic function B+C: 1-throw, 15.5 mm
- Panic function D+E: 2-throws, 10 mm / 20 mm
- Finish : Available in silver, **SS304**



ECO-External Handle D-1 10 short plate

- Lever handle guidance with a maintenance-free friction bearing made of self-lubricating nylon.
- Fixed swivel-mounted lever handle.
- Can be used for DIN left/DIN right. Steel substructure with positioning studs.
- Non-visible, continuous screw attachment
- Finish : Available in silver, **SS304**

ECO EPN900 Panic Push Bar

- Tested according to EN 1125, EN 1634 & EN 1191
- Only suitable for use as a closure system according to EN 1125 with a tested and approved lock
- Suitable for use on smoke control and fire doors based on relevant tests
- Can be used for DIN left / DIN right
- Lever arms cranked wide, particularly suitable for electronic locking cylinders and short PZ distances
- Large, sturdy grip tube (vandalism)
- Finish : Available in silver, **SS304**



PANIC FUNCTIONS D&E

BKS-Panic mortise lock - B-2324

- For elements of: Timber / steel doors
- Function: Panic function D
- Application: Emergency exits according to EN 179, escape doors in accordance with EN 1125, Fire and smoke protection doors
- Centre lock: Manual locking
- Finish : Available in silver, **SS304**



BKS - External Handle short plate

- Lever handle guidance with a maintenance-free friction bearing made of self-lubricating nylon.
- Fixed swivel-mounted lever handle.
- Can be used for DIN left/DIN right. Steel substructure with positioning studs.
- Non-visible, continuous screw attachment
- Finish : Available in silver, **SS304**

BKS B7400 Panic Push Bar



- BKS push bar for use on smoke and fire protection doors and escape doors to DIN 18273, DIN 4102 and EN 1634 With integral gear made of stainless steel, 9 mm square size and hold-up spring
- Approval to EN 1125, For use on active and passive door leaves
- Suitable for heavy doors up to 300 kg
- Can be used for DIN left / DIN right
- Finish : Available in silver, **SS304, SS316**



VARAV

VARAV is a reliable door hardware supplier, delivering high-quality, durable, and performance-driven architectural solutions. Designed for residential, industrial and commercial spaces, the hardware ensures strength, safety, low maintenance, and modern aesthetics with long-lasting performance.

Get In Touch!



+971 52 761 8185



+971 43 554 408



info@varav.ae



www.varav.ae



Office No. G-15, DIC, Dubai, United Arab Emirates.